


● PCB MOUNTING LEDs - Ø 5mm

FEATURES

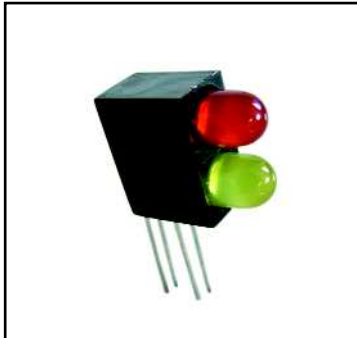

110 SERIES

PACK QUANTITY = 250 PIECES

- Material conforms to UL94 V-O flammability ratings
- Bi-colour and resistor models enhance potential for saving assembly time and board space
- Reverse polarity options available
- Typically available ex stock

SPECIFICATIONS

Ordering Information & Typical Technical Characteristics (Ta = 25°C)



Mean Time Between Failure up to = 100,000 Hours. Luminous intensity figures refer to the unmodified discrete LED.

PART NUMBER	COLOUR	LENS	VOLTAGE DC Vopr	CURRENT DC Iopr	LUMINOUS INTENSITY Iv@20mA	WAVE LENGTH λp	OPERATING TEMP ToPr	STORAGE TEMP Tstg	
STANDARD INTENSITY									
01-110-000-04-50	Red Over Green	White Diffused	2.0/2.2*	20	60/40	627/565	-40 ~ +85^	-40 ~ +85	Yes
UNITS			Vdc	mA	mcd	nm	°C	°C	

* = Voltage DC for 20mA product is Vf@20mA, not Vopr

^ = Products must be derated according to the derating information below. Each derating graph refers to specific LEDs.

01-110-000-04-50 consists of 505 (red) and 514 (green).

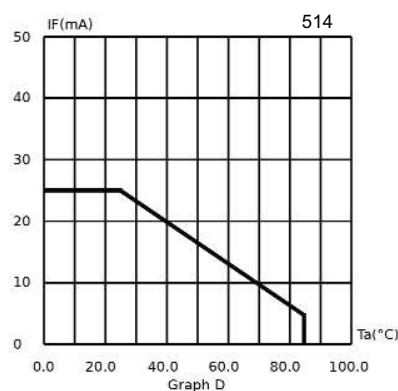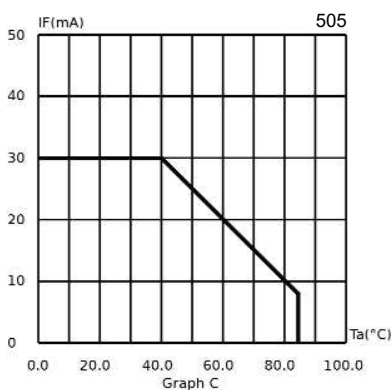

The information contained in this datasheet does not constitute part of any order or contract and should not be regarded as a representation relating to either products or service. We reserve the right to alter without notice the specification or any conditions of supply for products or service.



BS EN ISO 9001:2000
Approved Manufacturer

