


422/423

Ø 7.4 mm Mounting Domed Lens

Series:

- Front panel replaceability - use with panel mounting/wiring sockets
- Robust socket for high vibration applications (see pages 27 and 28)
- MLQ 20
- MTBF 90,000 hrs

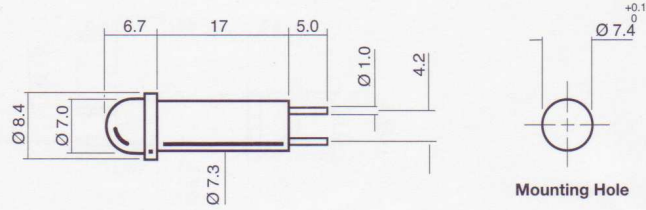

Scale 1 : 1
Dimensions in mm (Typical)

Ordering information and technical characteristics (Ta = 25°C)

Order code	Colour	Lens	Voltage DC Vopr	Current DC Iopr	Luminous Intensity Iv @ Iopr	Wave Length λp	Viewing Angle (Inclusive)	Operating Temp Topr	Storage Temp Tstg
422 - 503 - 04	Red	Water Clear	2.1	20	68	650	180	0 to + 85	0 to + 85
422 - 506 - 04	Orange		2.1	20	100	610			
422 - 509 - 04	Yellow		2.2	20	68	585			
422 - 512 - 04	Green		2.2	20	100	563			
422 - 503 - 20	Red		5/6	15/20	51/68	650			
422 - 506 - 20	Orange		5/6	15/20	75/100	610			
422 - 509 - 20	Yellow		5/6	15/20	51/68	585			
422 - 512 - 20	Green		5/6	15/20	75/100	563			
422 - 503 - 21	Red		12	20	68	650			
422 - 506 - 21	Orange		12	20	100	610			
422 - 509 - 21	Yellow		12	20	68	585			
422 - 512 - 21	Green		12	20	100	563			
422 - 503 - 22	Red	24	20	68	650				
422 - 506 - 22	Orange	24	20	100	610				
422 - 509 - 22	Yellow	24	20	68	585				
422 - 512 - 22	Green	24	20	100	563				
423 - 503 - 04	Red	Coloured Diffused	2.1	20	68	650	180	0 to + 85	0 to + 85
423 - 506 - 04	Orange		2.1	20	100	610			
423 - 509 - 04	Yellow		2.2	20	68	585			
423 - 512 - 04	Green		2.2	20	100	563			
423 - 503 - 20	Red		5/6	15/20	51/68	650			
423 - 506 - 20	Orange		5/6	15/20	75/100	610			
423 - 509 - 20	Yellow		5/6	15/20	51/68	585			
423 - 512 - 20	Green		5/6	15/20	75/100	563			
423 - 503 - 21	Red		12	20	68	650			
423 - 506 - 21	Orange		12	20	100	610			
423 - 509 - 21	Yellow		12	20	68	585			
423 - 512 - 21	Green		12	20	100	563			
423 - 503 - 22	Red	24	20	68	650				
423 - 506 - 22	Orange	24	20	100	610				
423 - 509 - 22	Yellow	24	20	68	585				
423 - 512 - 22	Green	24	20	100	563				
			V	mA	mcd	nm	deg	°C	°C