



Features & Benefits

- ✓ Easy to install LED luminaire, designed for exterior surfaces
- ✓ Low profile fixture that recesses 27mm into a 40mm diameter hole
- ✓ Plug and play system – quick and reliable IP67 connections
- ✓ Powered by a 12V DC, short circuit protected LED driver
- ✓ Sustainable and efficient SMD-LED that consumes only 0.3W of energy
- ✓ Cool to the touch; fixtures will not get hotter than 34°C
- ✓ UV-resistant lens and marine grade stainless steel (316) fixture
- ✓ Solid “walk/drive-over” construction, designed for loads up to 2850N/285kg
- ✓ Tested for operating conditions, ranging from -35°C to +65°C
- ✓ Available in LED colors: cool white, warm white, blue, amber, green & red

Applications




- ✓ Tile, stone, pavers & concrete
- ✓ Decking & deck tiles
- ✓ Boat docks & piers
- ✓ Sidewalks & driveways

Outdoor Pro


Eyeleds® Outdoor Pro is an innovative range of plug and play outdoor surface lighting, driven by energy efficient and long lasting LED technology. The range consists of architectural, recessed walk-over landscape lighting, and is available in the round lens style. Eyeleds Outdoor® is used as accent, orientation, marker, guide or night-lights in outdoor landscape designs, decking, pavers, tile, boat docks, piers, concrete sidewalks and driveways.

Eyeleds® Outdoor Pro, low profile LED light fixtures, install flush into most exterior surfaces. The fitting recesses into a 40mm diameter hole, drilled through the surface of the material. The fixtures are made of top quality materials and components that are resistant to corrosion and UV-radiation. The solid construction is engineered to withstand heavy use: walking or even driving over the lights is not a problem.


Specifications

Voltage	12V DC
Power Consumption	0,3W/25mA
Rated Life	up to 100.000 Hours
Materials	
Lens	UV Res. Polycarbonate
Housing	UV Res. Polycarbonate
Trim Ring	Stainless Steel 316
Cable	PUR
Cable	2 x 0,75 mm ²
Surface Temperature	Max. 34°C
Operating Temperature	-35°C to +65°C
Drive/Walkover Pressure	Max. 2850N/285kg
Warranty	3 Years Limited
Standards	  
Environment	IP67 Outdoor Rated


Dimensions

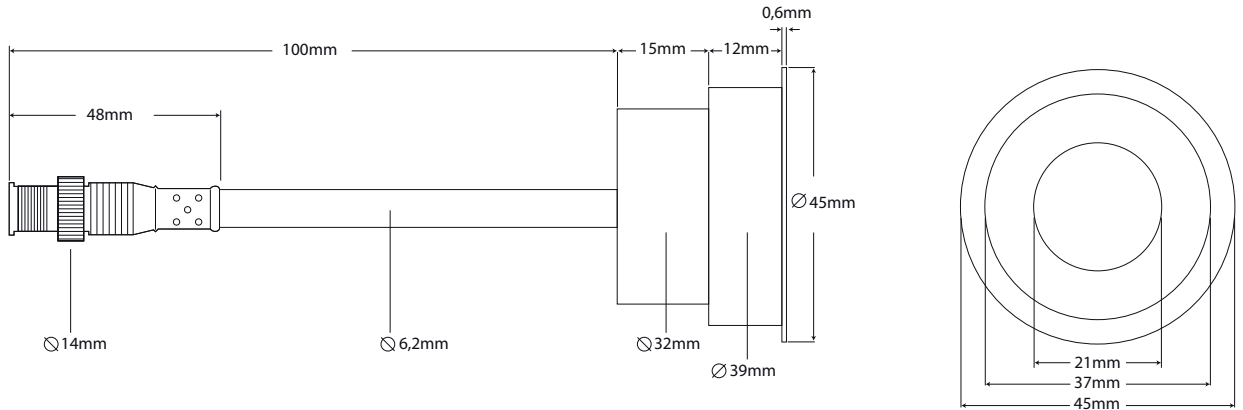

Installation

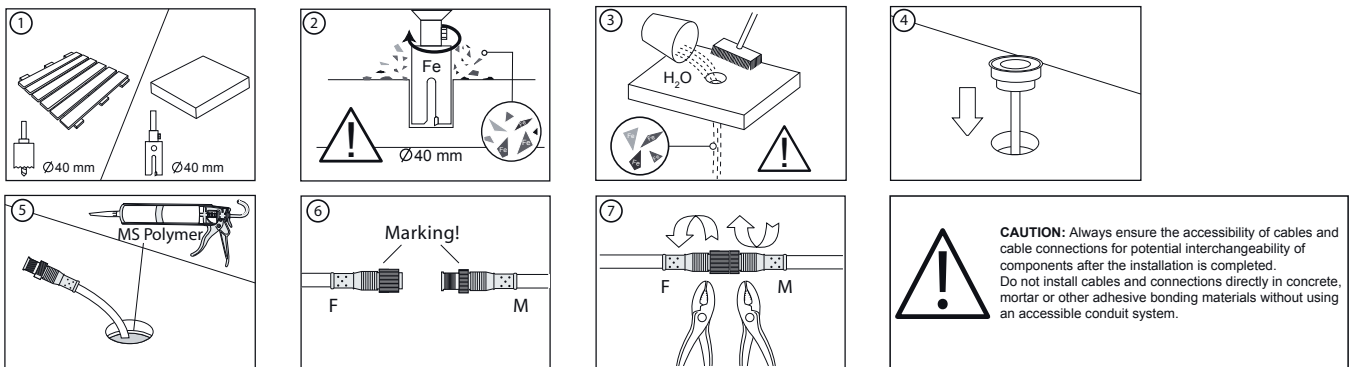

Example Connection Diagram

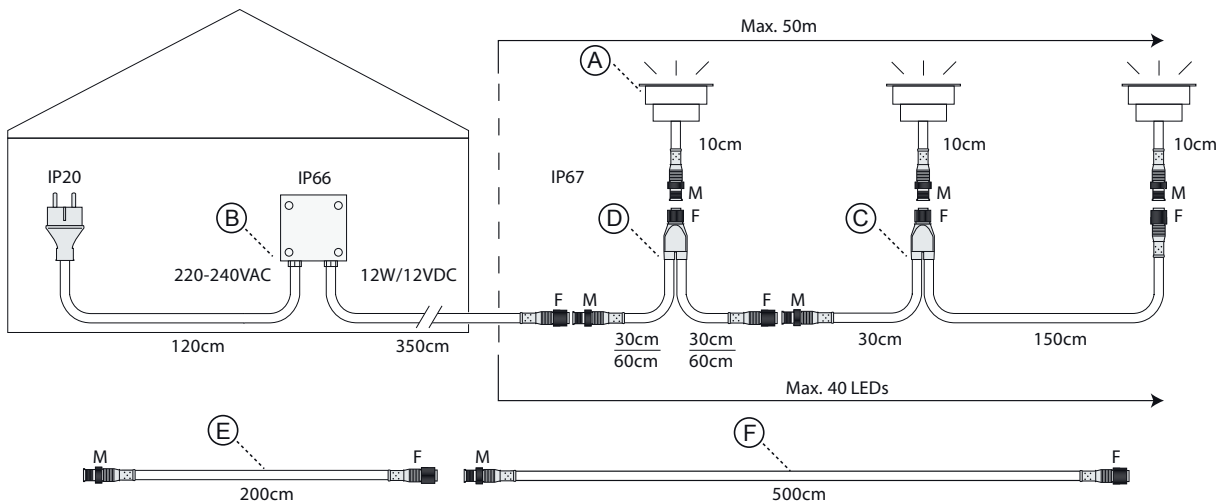

Ordering Information

Product	Finish / LED Colour	Item Code	Accessory	#	Item Code
LED unit (A)	Brushed Stainless Steel / Cool White LED	176.019.0U.03509	Power Supply EU 12V / 12W	(B)	AZ.10.00.01U
LED unit (A)	Brushed Stainless Steel / Warm White LED	176.019.0U.40809	Power Supply UK 12V / 12W		AZ.86.00.01U
LED unit (A)	Brushed Stainless Steel / Blue LED	176.019.0U.21609	Power Supply CH 12V / 12W		AZ.85.00.01U
LED unit (A)	Brushed Stainless Steel / Amber LED	176.019.0U.04109	T-Splitter 30cm / 150cm	(C)	AZ.11.00.01U
LED unit (A)	Brushed Stainless Steel / Red LED	176.019.0U.32209	T-Splitter 30cm / 30cm	(D)	AZ.12.00.01U
LED unit (A)	Brushed Stainless Steel / Green LED	176.019.0U.26209	T-Splitter 60cm / 60cm	(D)	AZ.22.00.01U
			Extension Cable 200cm	(E)	AZ.13.00.01U
			Extension Cable 500cm	(F)	AZ.14.00.01U