

Benefits

- Up to three times longer life at approximately half the energy consumption of conventional sources.
- Significantly longer life leads to reduced maintenance and material costs.
- Good color rendering for enhanced visibility and safety.
- Choice of mounting options to meet a variety of architectural forms in horizontal and vertical positions.
- Instant on/instant re-strike.

LBP G4 SP002
Dec 2009

Pyramid LowBay

Combining superior performance and energy efficiency with style. Typical applications include warehouse, stockroom, parking garage and other large volume facilities requiring wide distribution of glare free, low maintenance light.

Mounting options include pendant, surface or sloped conditions. The wide range power supply does not require special ballast or voltage considerations.

Features

Lumen Output	5073
Input Power	77 Watts
Efficacy	66 (lm/w)
Color Temperature (CCT)	6400K
Color Rendering Index (CRI)	72
Rated Life	50,000 Hours 70% Lumen Maintenance

Controls	
Occupancy Sensor	Hi/Low 50% Output Power
Housing	
Included standard	Anodized Aluminum Black
Mounting Options	
	Surface Mount Pendant Mount


Dimensions	
	14"x14"x4" w/o PSU 356x356x102mm w/o PSU 14"x14"x8" w/ PSU 356x356x203mm w/ PSU
Power Supply	
	5" x 4.4" x 1.84" 127x112x47mm

Operating Temperature	-40°C to +45°C
Voltage	100-277 Volts AC @ 50-60 Hz
Weight	28lbs w/PSU
Warranty	5 Year Limited
Certification	CE ETL RoHS

Environment	IP66 WET
-------------	----------


Pyramid LowBay

Cool White Illustrated

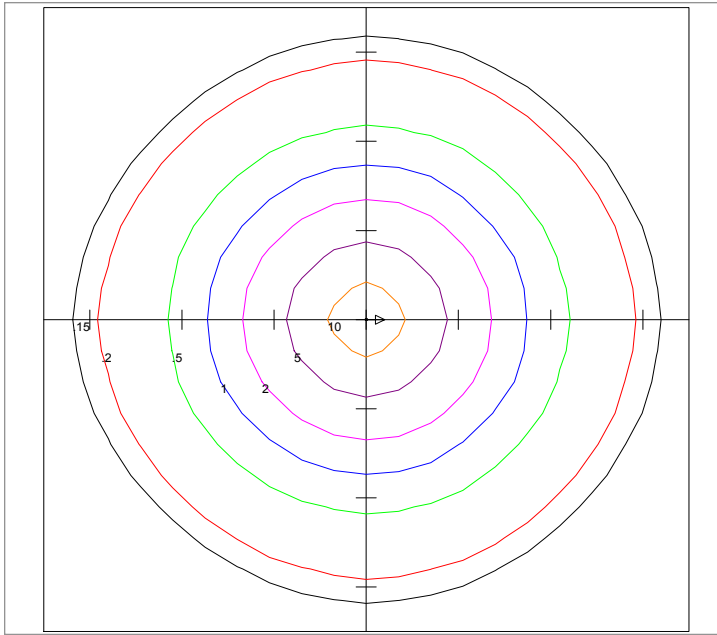

Horizontal Footcandles
 Scale: 1 Inch = 10 Ft.
 Light Loss Factor = 1.00
 Lumens Per Lamp = N.A. (absolute photometry)
 Luminaire Lumens = 5073

Mounting Height = 10.00 FT
 Arrangement: Single
 Maximum Calculated Value = 13.46 Fc

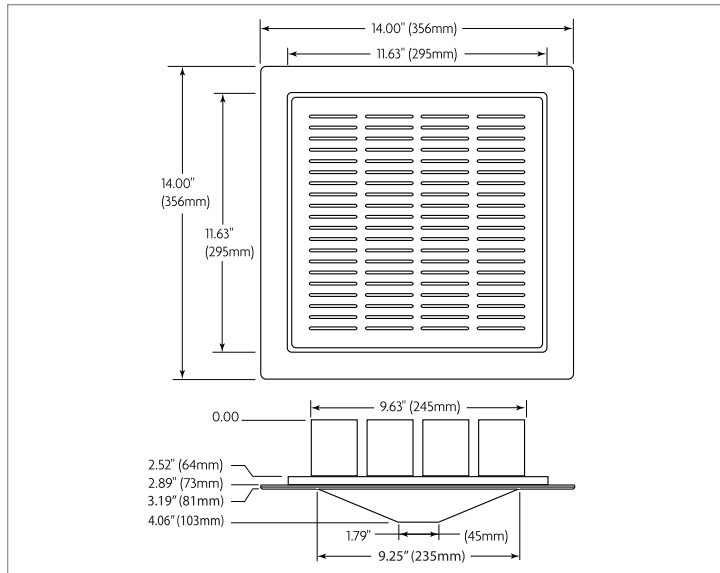

Dimensions shown in inches (mm)



Lighting Science Group Corporation
 1227 S. Patrick Drive BLDG 2A
 Satellite Beach, FL 32937
 t: 877-999-5742
 www.lsgc.com

Specifications subject to change.

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0°	Average 45°	Average 90°
45°	28,875	29,353	30,044
55°	29,525	30,388	30,476
65°	30,880	30,366	32,345
75°	37,189	35,521	38,742
85°	61,478	90,572	63,258

Zonal Lumen Summary

Zone	Lumens	% Fixt
0-30	1084	21.4
0-40	1828	36
0-60	3432	67.7
0-90	4998	98.1
60-90	1546	30.5
0-180	5073	100.0

©2009 Lighting Science Group Corporation. All rights reserved.



Pyramid LowBay

Ordering Information

Example: LBP CW CLR SRF

Product	Color Temperature	Lens	Mounting	Generation	Housing Color	Options
LBP Pyramid LowBay	CW Cool White	CLR Clear	SRF Surface	G4 5073 Lumens	Black - Included standard	CS Occupancy Sensor
		FRT Frosted	PND Pendant		CU - Custom ¹	

Notes:

1. Please contact a representative for availability and lead times.



Lighting Science Group Corporation
1227 S. Patrick Drive BLDG 2A
Satellite Beach, FL 32937
t: 877-999-5742
www.lsgc.com