



### Benefits

- Full dimmability on most common electronic RC dimmers.
- Energy savings up to 40% compared to CFL fittings. (based on Power usage and delivered Lux levels)
- These type of fittings are commonly used in corridors and offices, operating long hours.

## Stellar Downlight 260

The Stellar Series of LED downlights offer a 1:1 replacement of recessed fittings typically equipped with traditional CFLs. The fixtures are available in standard sizes, and matched to deliver the equivalent of a CFL recessed fitting from 18-52W, ensuring the same amount of light as in the original lighting design.

The LEDs are optimally driven for secure operation and longevity, and the light output is matched to full operation (hot Lumens). The range is delivered with a dimmable driver as standard that operates with most electronic dimmers available on the market.

### Features

<b>Lumen Output*</b>	29W	41W
Warm White	1300	1700
Neutral White	1400	1800

<b>Efficacy</b>		
Warm White	45 (lm/W)	41 (lm/W)
Neutral White	48 (lm/W)	44 (lm/W)

<b>Colour Temperature (CCT)</b>		
Warm White	3000K	
Neutral White	4000K	

<b>Colour Rendering Index (CRI)</b>		
Warm White	85	
Neutral White	85	

<b>Beam Angle</b>	70°
-------------------	-----

<b>Rated Life</b>	60.000 Hours @ 70% Lumen Maintenance
-------------------	---

<b>Housing</b>	Die-Cast Aluminium powder coated/Zintec
----------------	---

<b>Lens</b>	Polycarbonate/Acrylic
-------------	-----------------------

<b>Dimmable</b>	Optional
-----------------	----------

<b>Operating Temperature</b>	-10°C to +40°C
------------------------------	----------------





<b>Voltage</b>	220 - 240V 50/60Hz
----------------	--------------------

<b>Operating Current</b>	500/700mA
--------------------------	-----------

<b>Safety Standards</b>	EN 60598 EN/IEC 62471
-------------------------	--------------------------



<b>EMC Standards</b>	EN 55015 EN 61547 EN 61000-3-2/3
----------------------	--

<b>Certification</b>	 
----------------------	---

<b>Symbols</b>	   
----------------	---

\* Cool White available on request

# Stellar Downlight 260

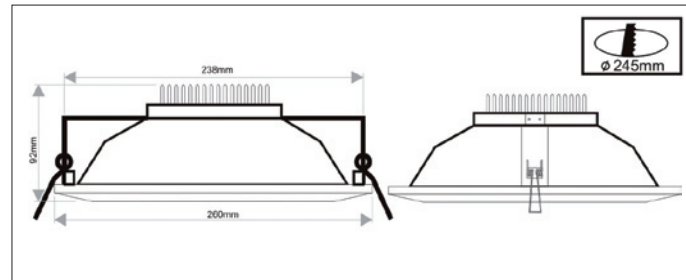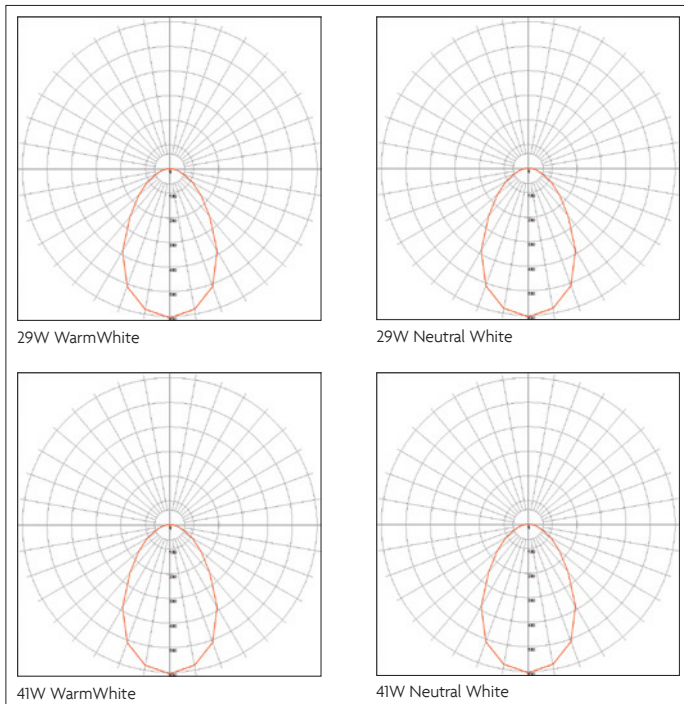

Dimensions shown in mm

## Ordering Information

Example: STR 260 500 NW 230

Family	Current (mA)	Colour Temperature	Voltage
STR 260	500 500mA	NW Neutral White	230 230V
	700 700mA	WW Warm White	

STR260 SP001-UK  
March 2010

©2010 Lighting Science Group BV. All rights reserved.  
Specifications subject to change.



Lighting Science Group B.V.  
Amundsenweg 1  
4462 GP Goes  
The Netherlands  
Tel.: +31 113 272020  
www.lsgc.com  
customerserviceEU@lsgc.com