



APPROVAL	DATE



ACTUAL SIZE

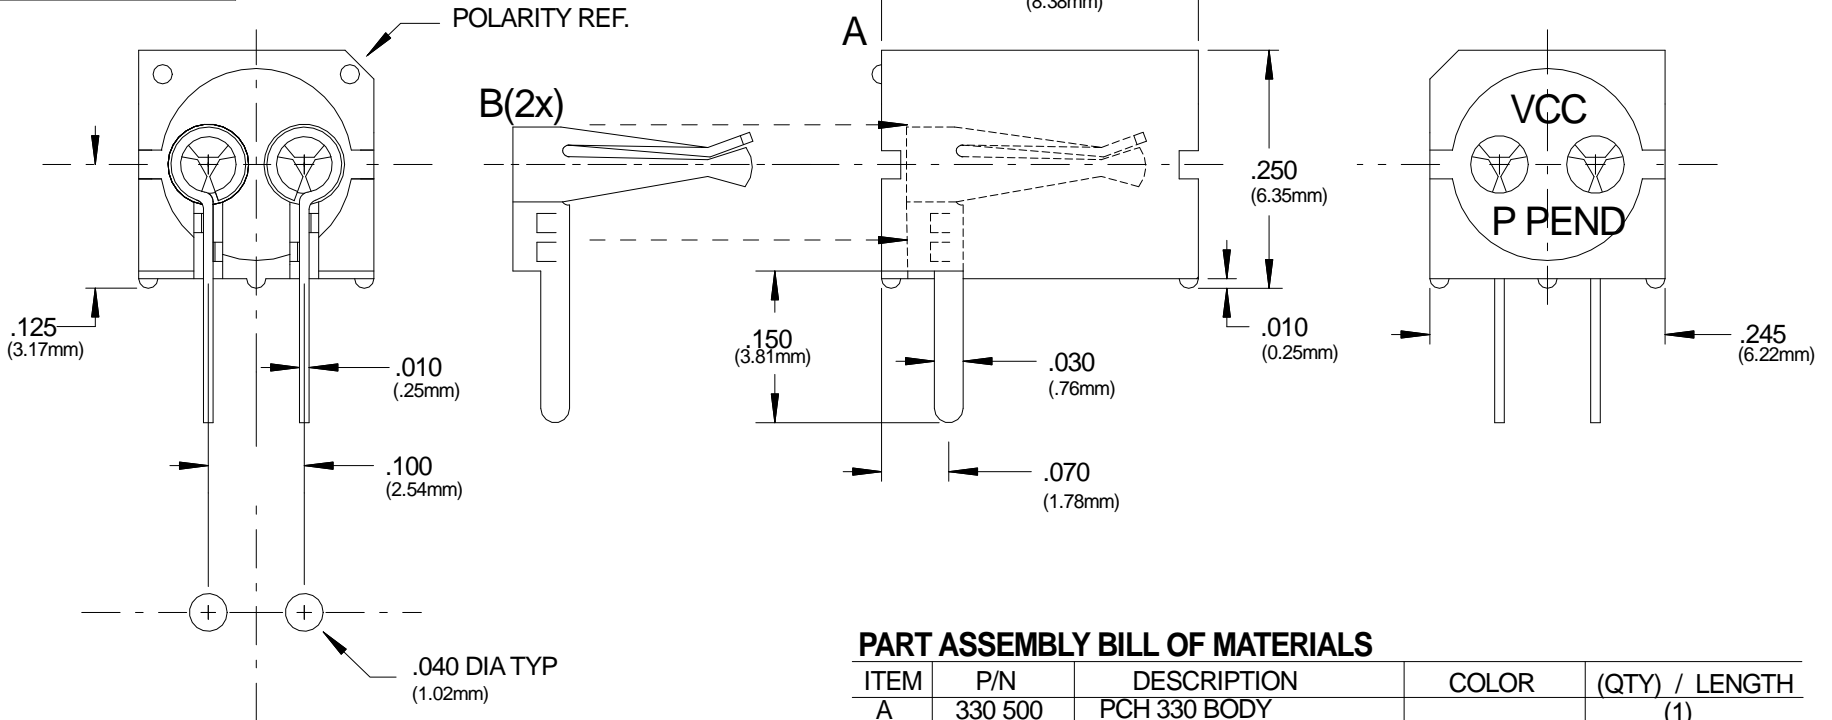

PCH HOLE PATTERN

**PART ASSEMBLY BILL OF MATERIALS**

ITEM	P/N	DESCRIPTION	COLOR	(QTY) / LENGTH
A	330 500	PCH 330 BODY		(1)
B	330 002	PCH TERMINAL		(2)

**NOTES:**

**Material:**

Body Nylon 6/6, U. L. 94V-0 Rating  
 Color Black (unless otherwise spec.)  
 Contact Phosphor bronze, tin sulfamate plate

**Mounting:**

Spacing on 0.250" centers

**Opto:**

Standard visible, IR LED or photodetector  
 with leads on 0.100" centers

**LED Lead Dimensions:**

Minimum 0.017" (.43mm) round or square shape  
 Maximum 0.030" (.76mm) thickness - 0.040" (1.02mm) width

U.S. / FOREIGN PAT. ISSUED & PEND.

REVISIONS			
NO	DESCRIPTION	DATE	BY
1	UL Rating chg was 94V2 is 94V0	7/90	JS
2	Update Drawing Format	06/27/08	JG
3			
4			
5			
6			

VCC P/N: P-C-LITE<sup>®</sup> PCH330

**VCC VISUAL COMMUNICATIONS COMPANY, INC.**  
 190 Bosstick Blvd, Ste. 101 San Marcos, California 92069 U.S.A.  
 Phone (760) 560-1300 Fax (760) 560-1301 e-mail vccsales@vcclite.com

TOLERANCES (EXCEPT AS NOTED)	SCALE <b>5 X</b>	DATE <b>6/02/88</b>	DRAWING NO.	REV.
DECIMAL ±.010	DIAMETER .003 Max	DRAWN BY <b>JMS</b>	<b>PCH330A</b>	<b>2</b>
ANGLE ± 30'	RADI .008 Max	CHK'D		