


HPA-1208-WE



LED Converter

HPA-1208-WE

Images

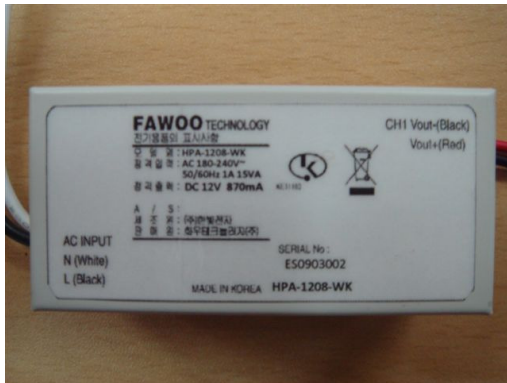

Specification

Certificate Holder	Hanbit Electronics Co.Ltd
Name	Converter, LED Converter
Model(s)	HPA-1208-WE & HB-12080
Description	Input Voltage(100-240)V a.c. Frequency (50-60)Hz Output Voltage 12V d.c. Output current 833mA Ip degree IP00
Tested according to	EN 61347-1:2001 EN 61347-2-13:2006 EN 55015/A1:2007 EN 61547/A1:2000 EN 61000-3-2:2006 EN 61000-3-3/A2:2005
Certifications	CE,UL,TUV
Fixture body	Iron
Rated lifetime (hrs)	30,000 ~ 50,000
Warranty	3 years (12 hours a day)
size	600mm x 300mm x 300mm

Features & benefits

- 1 converter can connect with 1pc of LH5W or 2pcs of 3W simultaneously.
- Guaranteed 3 years only if used 12 hours/day
- Shock resistant

Note(*) : Test results from the ITL (Independent Testing Laboratory), an independent testing laboratory accredited by U.S Department of Energy (http://www1.eere.energy.gov/buildings/ssl/test_labs.html)

The specification can be updated without any pre-notice to clients
The information above pertains to clients without any legal responsibility