

Q38 Series

Preliminary Product Specifications

ANZ#: Z217, January 30, 2014

High Power LED Driver

Total Power	40 Watts max.
Input Voltages	110 ~ 277VAC
Number of Outputs	One

SPECIAL FEATURES

- Universal Input range from 100VAC~304VAC, 50/60Hz
- Versatile mechanical design maximizes design flexibility.
- Size: XP: TBD / XM:108.3x76.3x30mm (LxWxH)
- Fully potted, suitable for dry and damp location applications
- 3 in 1 Dimming Control plus “ENABLE” input
- UL8750 and CE compliant (pending)
- Wide selection of pre-adjusted C/C outputs (factory setting)

Picture Not Available

ENVIRONMENTAL

Operating temperature:	-40 to +50 ° C, Tc: 80 ° C
Storage temperature:	-40 to +85 ° C
Humidity (Non-Condensing):	5% to 95%
Cooling:	Convection
Vibration Frequency:	5 to 50 Hz
MTBF:	>100,000 Hours at full load and 25°C ambient conditions (TELC3 – Telcordia SR-332, Issue 3)



Picture shown above is not to scale


SPECIFICATIONS :

Input Range : 100 ~ 277VAC	Frequency : 47 to 63Hz
Power Factor: > 0.92 at 65% to 100% load, 115VAC or 230VAC	Inrush Current : 25.0 Amps max. at 230VAC, cold start 25 ° C
Input Current : 0.6 Amps max. at 115VAC	Efficiency : 87% Typical
Output Current Regulation : ±3%	Maximum Power : 40W
Protection : OCP, SCP, OLP – Auto Recovery	Leakage Current : 50uA typ.
Control : 0-10V dimmer; PWM (250-3KHz); Potentiometer; Enable	Dimension: XP: TBD / XM:108.3x76.3x30mm (LxWxH)
Hold up time: Half cycle min. at 120VAC and 80% rated load	Regulation Compliance: UL8750 or EN61347, EN55015, EN61547


MODEL SELECTION :

Model Number	Constant Voltage Mode			Model Number	Constant Current Mode		
	V (DC)	A (mA)	Max. W		A (mA)	V (DC)	Max. W
Q38-U24-Xz	24, ±5%	1700	40	Q38-U24-Cyyyy-Xz	1850 ~ 830	14 ~ 24	40
Q38-U36-Xz	36, ±5%	1150	40	Q38-U30-Cyyyy-Xz	1500 ~ 650	19 ~ 30	40
Q38-U48-Xz	48, ±5%	850	40	Q38-U36-Cyyyy-Xz	1250 ~ 550	23 ~ 36	40
Notes: 1. “Xz” is optional - “Blank” = 5VA plastic case ; “Xp” = 94V-0 plastic case ; “Xm” = stud-mount metal case 2. yyyy = Output current				Q38-U42-Cyyyy-Xz	1050 ~ 470	27 ~ 42	40
				Q38-U48-Cyyyy-Xz	950 ~ 570	30 ~ 48	40
				Q38-U54-Cyyyy-Xz	820 ~ 420	34 ~ 54	40
				Q38-U72-Cyyyy-Xz	610 ~ 250	47 ~ 72	40


Dimming Wiring Diagram

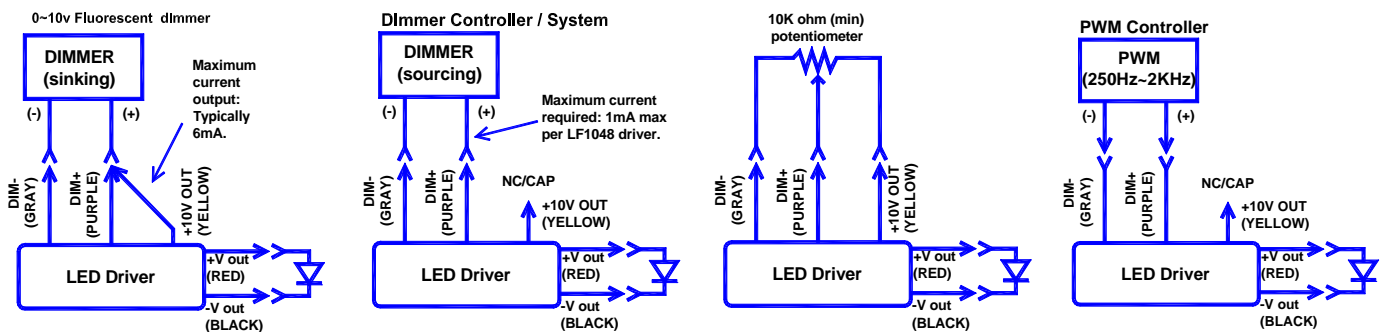


De-rating Temp. vs. Load

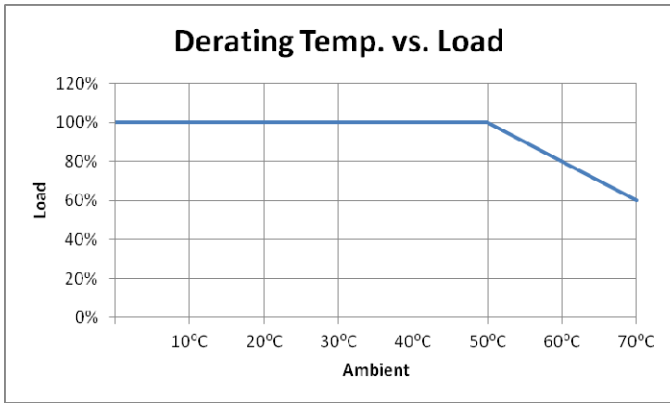


Efficiency vs. Load

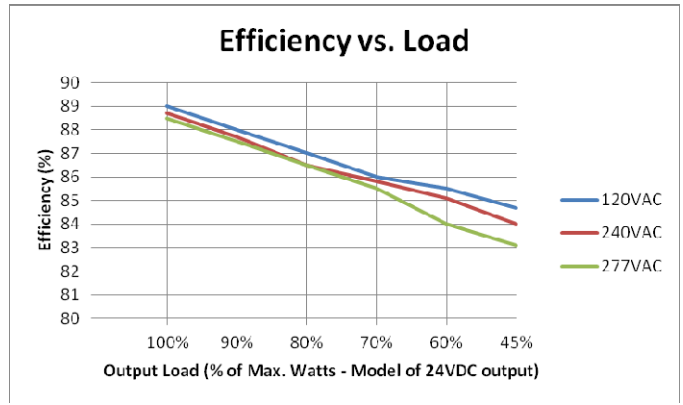


Power Factor vs. Load

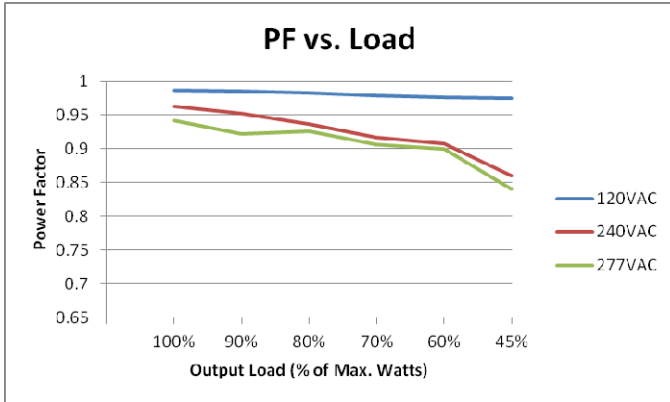


THD vs. Load

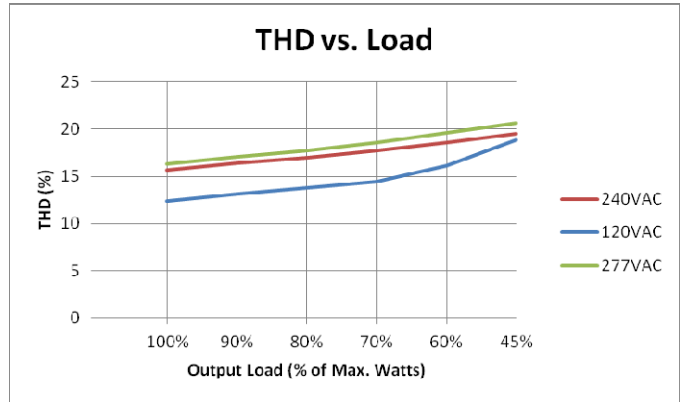

PWM Dimming Curve

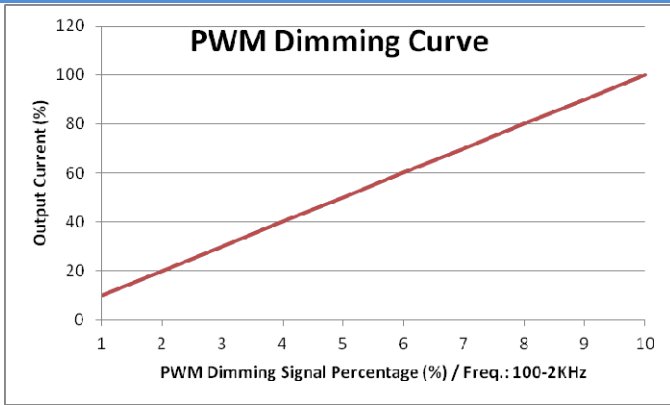

1-10V Dimming Curve

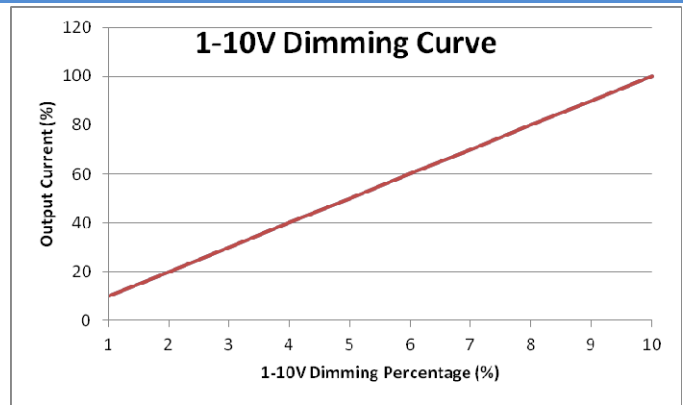

MECHANICAL SPECIFICATION : Q38-UXX-CYYYY

-XP, plastic enclosure

-XP, metal stud-mount enclosure (Preliminary)

